




Mitsubishi Water Pump, Durable, Strong and Great Powered

## Specifications 220-240 Volt /50/60 Hz

| TYPE                   | MODEL              | OUTPUT W. (watt) | DISCHARGE HEAD (M.) | DISCHARGE CAPACITY : L/min |         | Number of Water Tap(s)* | PRESSURE - SW kg./cm. |             |       | SUCTION PIPE mm. (inch) | DISTRIBUTION PIPE mm. (inch) | WEIGHT :Kg. NET | DIMENSIONS         |            | TYPE OF BUILDING   |
|------------------------|--------------------|------------------|---------------------|----------------------------|---------|-------------------------|-----------------------|-------------|-------|-------------------------|------------------------------|-----------------|--------------------|------------|--------------------|
|                        |                    |                  |                     | (0 M.)                     | (12 M.) |                         | ON                    | OFF         | MAX** |                         |                              |                 | (BASE) Wide x Deep | (NET) High |                    |
| AUTOMATIC : WP         | WP-85Q3            | 80               | 8                   | 29                         | 21      | 1-3                     | 1.3                   | 1.9         | -     | 20(3/4)                 | 20(3/4)                      | 13              | 365X365            | 530        | 1-2 Floor Building |
|                        | WP-105Q3           | 100              | 11                  | 31                         | 24      | 1-3                     | 1.3                   | 1.9         | -     | 20(3/4)                 | 20(3/4)                      | 13              | 365X365            | 530        |                    |
|                        | WP-155Q3           | 150              | 12                  | 37                         | 30      | 1-4                     | 1.3                   | 1.9         | -     | 25(1)                   | 25(1)                        | 13              | 365X365            | 530        |                    |
|                        | 2-3 Floor Building | WP-205Q3         | 200                 | 16                         | 46      | 38                      | 1-5                   | 2.1         | 2.8   | -                       | 25(1)                        | 25(1)           | 19                 | 425X425    | 580                |
|                        |                    | WP-255Q3         | 250                 | 19                         | 48      | 42                      | 1-6                   | 2.1         | 2.8   | -                       | 25(1)                        | 25(1)           | 19                 | 425X425    | 580                |
|                        |                    | WP-305Q3         | 300                 | 19                         | 55      | 46                      | 1-7                   | 2.1         | 2.8   | -                       | 25(1)                        | 25(1)           | 19                 | 425X425    | 580                |
|                        |                    | WP-355Q3         | 350                 | 20                         | 58      | 50                      | 1-8                   | 2.4         | 2.8   | -                       | 35(1 1/4)                    | 35(1 1/4)       | 21                 | 425X425    | 650                |
|                        | Single House       | WP-405Q3         | 400                 | 22                         | 63      | 55                      | 1-9                   | 2.4         | 2.8   | -                       | 35(1 1/4)                    | 35(1 1/4)       | 21                 | 425X425    | 650                |
| NON-AUTO : CP          | CP-255Q3           | 250              | 27                  | 48                         | 42      | -                       | -                     | -           | -     | 25(1)                   | 25(1)                        | 11              | 335X330            | 335        | High-rise building |
|                        | CP-405Q3           | 400              | 30                  | 63                         | 55      | -                       | -                     | -           | -     | 35(1 1/4)               | 35(1 1/4)                    | 11              | 335X330            | 335        |                    |
| CONSTANT PRESSURE : EP | EP-155Q3           | 150              | 12                  | 37                         | 30      | 1-4                     | 1.3                   | 1.9         | 2.9   | 25(1)                   | 25(1)                        | 10              | 380X320            | 340        | 2-3 Floor Building |
|                        | EP-205Q3           | 200              | 16                  | 46                         | 38      | 1-5                     | 2.1                   | 2.8         | 4.0   | 25(1)                   | 25(1)                        | 12              | 380X320            | 340        |                    |
|                        | EP-305Q3           | 300              | 19                  | 55                         | 46      | 1-7                     | 2.1                   | 2.8         | 4.0   | 25(1)                   | 25(1)                        | 13              | 380X320            | 340        |                    |
|                        | Single House       | EP-405Q3         | 400                 | 22                         | 63      | 55                      | 1-9                   | 2.3         | 2.8   | 4.0                     | 35(1 1/4)                    | 35(1 1/4)       | 13                 | 380X320    | 340                |
| INVERTER : IP          | IP-505Q3           | 500              | 23(Low)<br>26(High) | 70                         | 58      | 1-10                    | LOW<br>2.7            | HIGH<br>3.0 | -     | 35(1 1/4)               | 35(1 1/4)                    | 12              | 380X320            | 340        | Single House       |


Remark : Product specifications are subject to change without notice.

The maximum suction head of the Non-Automatic pump type and automatic type is 9 meters. \*Number of water taps or points of water consumption at the same time  
The pressure switch's conversion of 1 Kg/Cm<sup>2</sup> = 0.98 bar or 14.2 PSI or 14.2 Lb/In<sup>2</sup> \*\*The pressure level of model EP while the flow switch is working.

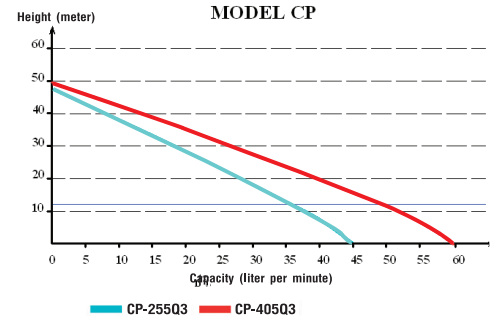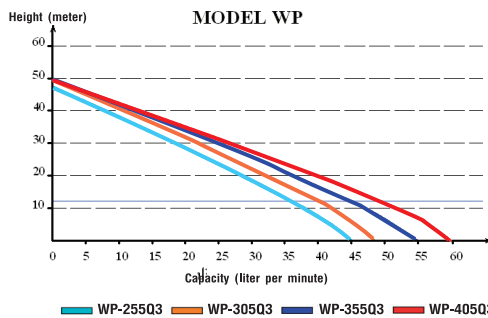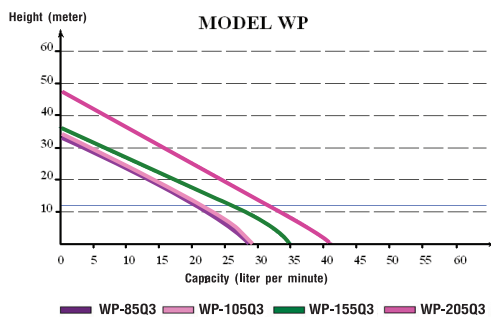

### Example of Mitsubishi water pump usages

Water resource is a well or under-ground water tank (should use only clean water)

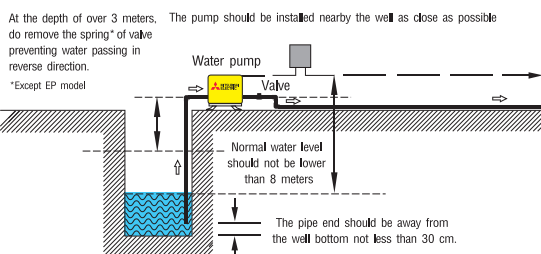

Water resource is an on-ground water tank (should use only clean water)

